

E-RSCP SERIES
T8 or T5 RADIAL LENS WRAP - POWDERCOATED FOR GARAGE APPLICATION





<p>Housing: 22GA steel. Finish: Post powdercoat gloss white. Construction: CNC formed and mechanically joined with welded endcaps. Lens: Proprietary high-performance, radial, linear lens - fully gasketed.</p>			<p>Mounting: Suspended or surface mounted. Distribution: Wide. Electrical: Electronic Low, Standard or High output options; Instant Start is factory standard for T8, Program Start for T5; <10% THD; Inherent thermal protection; Dimming & Emergency available. Labels: UL/CUL listed. Damp Location.</p>			
SPEC.	NOM.	DESCRIPTION	SPEC.	NOM.	DESCRIPTION	
Finish	P	Powdercoat gloss white Please specify other color on PO if required.	Lens	RL	Radial linear acrylic	
		Dimension			12	Nominal 6" wide x 24" long
13	Nominal 6" wide x 36" long		H	347-480 volt		
14	Nominal 6" wide x 48" long		1	120 volt (specify with LED or dimming)		
18	Nominal 6" wide x 96" long		2	277 volt (specify with LED or dimming)		
Lamping	1 2 3 4 6 L	<p>T8 = 32W, 25W, 17W per lamp T5 = 54W, 39W, 21W or 28W, 21W, 14W per lamp T8/T5 lamps are not included unless otherwise noted. LED modules are installed by factory.</p> <p>(1) lamp in cross section (2,3,4ft) (2) lamps in cross section (2,3,4ft); 1 in cross (8ft) (3) lamps in cross section (2,3,4ft) (4) lamps - 2 in cross section (8ft only) (6) lamps - 3 in cross section (8ft only) LED – contact factory & specify voltage</p>	Reflector	E W	Enhanced Aluminum 95% reflective White Aluminum 90%+ reflective	
					Mounting	---
				---		Chain Suspended (by others) - no designation needed
				C		8ft Powercord, black 18/3 wire with 3 prong 120v plug
				Y		Y-fit Gripple® Toggle 6" Y x 8' long
				Ballast	S L H D P SP HP S5 H5 LED LDD	<p>T8 Standard Electronic T8 Low Output Electronic T8 High Output Electronic T8 Electronic Dimming T8 – specify type & voltage Program Start Electronic T8 Standard Output/Program Start Combination T8 High Output/Program Start Combination T8</p> <p>T5 Standard Electronic T5 28W High Output Electronic T5 54W</p> <p>LED LED Transformer – contact factory LED Dimming Transformer – contact factory</p>
O	Open 360° Motion Sensor **extends fixture length 6"					
D	Open 360° Motion Sensor w/ Daylight Control Photocell- **extends fixture length 6"					
V	Vandal Resistant Lens Retention					
IP66	IP66 Rated Housing – contact factory for specs					
SP	Shows as separate line item on order: part# H-Y6"HNGR-10' 2.5" Single Point Box (stem mount)					

ORDERING NOMENCLATURE GUIDE

Standard Fixture: E-RSCP142HRLUEG
Catalog # for a RSC Type Fixture – Powdercoated Gloss White - Nominal 1 ft x 4 ft Long - 2 Lamps in cross section - High Output T8 Electronic Ballast - Radial Lens - Universal Voltage - Enhanced Reflector - Standard Surface Mount - Gasketed for garage application.

8E Product	Series	Finish	Dimension	Lamping	Ballast	Lens	Voltage	Reflector	Mounting	Options
E -	RSC									

E-RSCP SERIES
T8 or T5 RADIAL LENS WRAP - POWDERCOATED FOR GARAGE APPLICATION

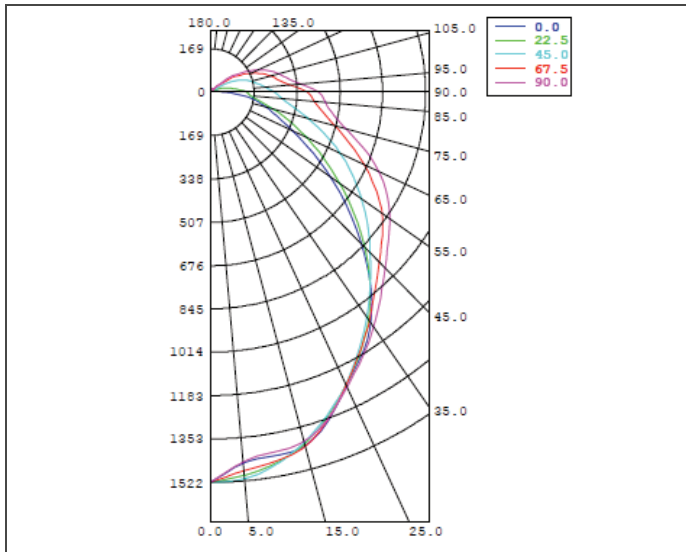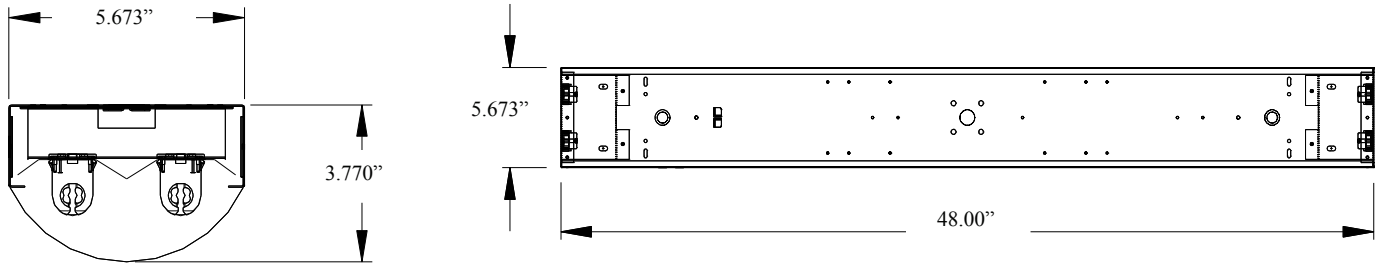

PRODUCT NUMBER = E-RSCP142HRLUEG
FIXTURE EFFICIENCY = 83.1%
S.M.H. = 1.18
WATTAGE = 70W (BASED ON 277V)
RCR TABLE AVAILABLE
IES PHOTOMETRIC FILE AVAILABLE

SPECIFICATION CHARACTERISTICS

- **Wide Distribution Utilizing Energy Efficient Components Throughout**
- **Highly Efficient Luminaire – Over 83%**
- **Garage Application – Replaces up to 175W HID**
- **Instant On, Long Life, Lower Energy Consumption, No Color Shift**
- **Uniform Illumination**
- **Dimming, Emergency Options**
- **LED is Available – Contact Factory with Requirements**
- **Multiple Motion Sensor Options – Extends Fixture Length 6"**
- **Multiple Mounting Options: Surface Mount, Chain or Gripple Ready, Cord or Single Point Box**
- **Proprietary Radial Linear Acrylic Lens for Wide, Even Distribution. Fully Gasketed Lens.**
- **Vandal Resistant Lens Retention Option – Additional Secured Lens Rails Installed with Stainless Steel Tamperproof Hardware**
- **Optional IP66 Rating – Contact Factory for Specification**
- **Finish: Gloss White Post Powdercoated. Other finishes available. Please consult factory.**
- **Short Lead Times**