

**E-WP SERIES
WALL PACK COMPACT FLUORESCENT LUMINAIRE**





<p>Housing: Heavy-duty die cast aluminum. Finish: Post powdercoat bronze. Hardware: Stainless Steel (standard). Stainless tamperproof available. Lens: Cast glass. Lamping: 841k lamps are included.</p>			<p>Mounting: Surface mounted. Distribution: Wide. Electrical: Electronic Program Start is factory standard; <10% THD; Inherent thermal protection. Labels: UL/CUL Listed. Wet Location. Sealed and Gasketed.</p>		
SPEC.	NOM.	DESCRIPTION	SPEC.	NOM.	DESCRIPTION
Finish	---	Powdercoat bronze – no designation needed	Voltage	U	Universal volt 120-277 (standard)
Dimension	11 12	Medium: Nominal 9”H x 7.25”D x 13”L Large: Nominal 9”H x 9”D x 16”L		1	120 volt (specify with LED or dimming)
Lamping	1 2 L	<p>Medium: T4 = 26W, 32W or 42W per lamp Large: T4 = 42W, 57W or 70W per lamp 841k lamps included unless otherwise specified.</p> <p>(1) CF lamping (2) CF lamping (not available with 42W on medium) LED – contact factory & specify voltage</p>	Reflector	E	Enhanced Aluminum 95% reflective
				Mounting	---
			Ballast		E26 E32 E42 E42 E57 E70 LED LDD
D	90° Shield for Dark Sky				
T	Torx tamperproof stainless steel screws				
Lens	---	Cast glass Lens - no designation needed			

ORDERING NOMENCLATURE GUIDE

Standard Fixture: E-WP112E26UE
 Catalog # for a WP Type Fixture – Powdercoated Bronze - Nominal 9” x 13” - 2 Lamps (Lamps are Included) - Standard 26W CF Electronic Ballast - Glass Lens - Universal Voltage - Enhanced Reflector - Standard Surface Mount.

8E Product	Series	Finish	Dimension	Lamping	Ballast	Lens	Voltage	Reflector	Mounting	Options
E -	WP									

**E-WP SERIES
WALL PACK COMPACT FLUORESCENT LUMINAIRE**

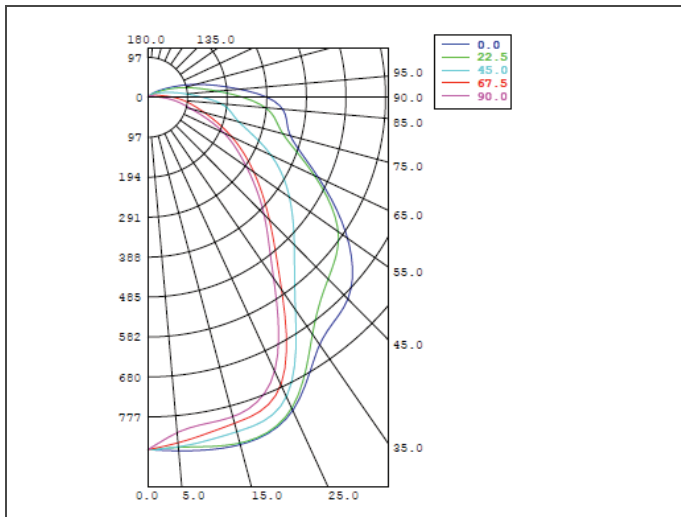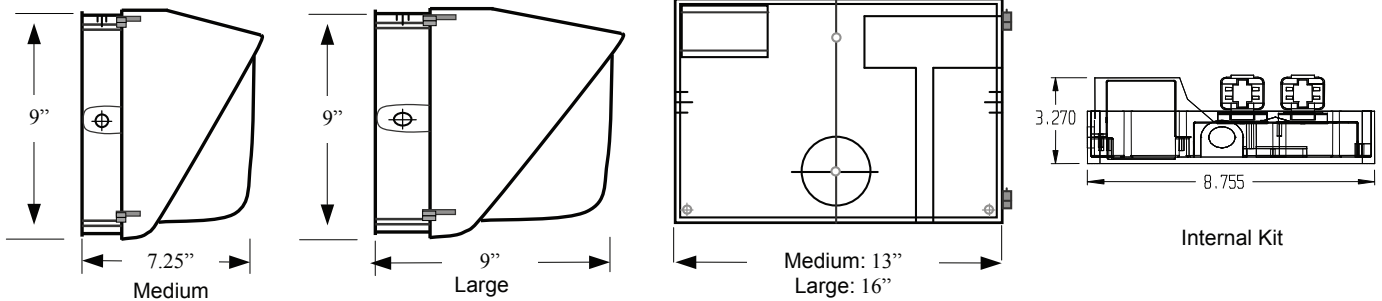

PRODUCT NUMBER = E-WP112E26UE

FIXTURE EFFICIENCY = 80.4%

S.M.H. = 1.14

WATTAGE = 59W (BASED ON 277V)

RCR TABLE AVAILABLE

IES PHOTOMETRIC FILE AVAILABLE

SPECIFICATION CHARACTERISTICS

- **Wide Distribution Utilizing Energy Efficient Components Throughout**
- **Highly Efficient Luminaire – Over 80%**
- **Large Wall Pack Meets Requirements for *Dark Sky* in 1-42w, 2-42w, 1-57w, 2-57w, 1-70w, 2-70w Configuration Utilizing Optional Hood**
- **Medium Wall Pack Meets Requirements for *Dark Sky* in 1-26w, 2-26w, 1-32w, 2-32w, 1-42w Configuration Utilizing Optional Hood**
- **Stainless Steel Hardware for Long Life. Stainless Tamperproof Option Available.**
- **Instant On, Long Life, Lower Energy Consumption, No Color Shift**
- **Uniform Illumination - Wide Distribution Spreads Light for Maximum Coverage**
- **LED is Available – Contact Factory with Requirements**
- **Heavy Duty Die Cast Aluminum Housing**
- **Surface Mount. Easy Ballast Access through Mounting Plate Provides Quick Maintenance.**
- **High Impact Cast Glass Lens**
- **Photocell Sensor Option**
- **Finish: Post Powdercoated Bronze**
- **Short Lead Times**