


**E-XKN SERIES**  
**KNUCKLE-MOUNT AIMABLE COMPACT FLUORESCENT LUMINAIRE**



<p><b>Housing:</b> Heavy-duty die cast aluminum.  <b>Finish:</b> Post powdercoat bronze.  <b>Hardware:</b> Stainless Steel (standard). Stainless tamperproof available.  <b>Lens:</b> Tempered glass.  <b>Lamping:</b> 841k lamps are included.</p>			<p><b>Mounting:</b> ½" conduit on knuckle mount.  <b>Distribution:</b> Wide.  <b>Electrical:</b> Electronic Program Start is factory standard; &lt;10% THD; Inherent thermal protection.  <b>Labels:</b> UL/CUL Listed. Wet Location. Sealed and Gasketed.</p>						
SPEC.	NOM.	DESCRIPTION	SPEC.	NOM.	DESCRIPTION				
Finish	---	Powdercoat <b>bronze</b> – no designation needed	Voltage	<b>U</b>	Universal volt 120-277 (standard)				
Dimension	11	Nominal 10" x 10"		<b>1</b>	120 volt (specify with LED or dimming)				
				<b>2</b>	277 volt (specify with LED or dimming)				
				<b>3</b>	347 volt (specify with LED or dimming)				
Lamping	1 2 L	<p><b>T4 = 26W, 32W or 42W per lamp</b>              841k lamps included unless otherwise specified.              (1) CF lamping (26W, 32W or 42W)              (2) CF lamping (26W or 32W)              LED – contact factory &amp; specify voltage</p>	Reflector	<b>E</b>	Enhanced Aluminum 95% reflective				
				Ballast	E26 E32 E42	<p>Electronic 26watt CF Ballast              Electronic 32watt CF Ballast              Electronic 42watt CF Ballast (1 lamp only)</p>	Mounting	---	½" Male Conduit - no designation needed
Lens	---	Tempered Glass Lens - no designation needed							


**ORDERING NOMENCLATURE GUIDE**

**Standard Fixture: E-XKN112E26UE**  
 Catalog # for a XKN Type Fixture – Powdercoated Bronze - Nominal 10" x 10" - 2 Lamps (Lamps are Included) - Standard 26W CF Electronic Ballast - Tempered Glass Lens - Universal Voltage - Enhanced Reflector - Knuckle Mount.

8E Product	Series	Finish	Dimension	Lamping	Ballast	Lens	Voltage	Reflector	Mounting	Options
<b>E -</b>	<b>XKN</b>									

**E-XKN SERIES**  
**KNUCKLE-MOUNT AIMABLE COMPACT FLUORESCENT LUMINAIRE**

Contact factory if line drawings are required.

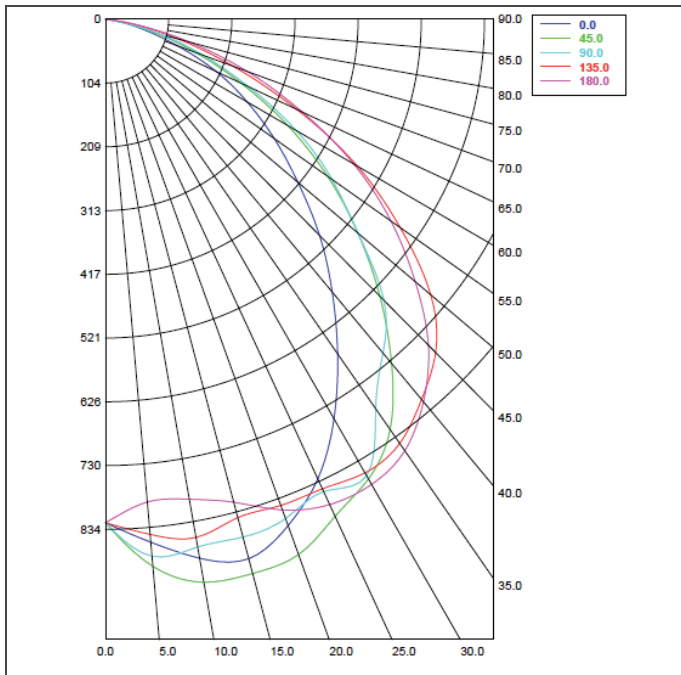

**PRODUCT NUMBER** = E-XKN112E26UE  
**FIXTURE EFFICIENCY** = 71.9 %  
**S.M.H.** = 1.30  
**WATTAGE** = 60W (BASED ON 277V)  
**RCR TABLE AVAILABLE**  
**IES PHOTOMETRIC FILE AVAILABLE**

**SPECIFICATION CHARACTERISTICS**

- **Wide Distribution Utilizing Energy Efficient Components Throughout**
- **Highly Efficient Luminaire – 71.9%**
- **Stainless Steel Hardware for Long Life. Stainless Tamperproof Option Available.**
- **Instant On, Long Life, Lower Energy Consumption, No Color Shift**
- **Uniform Illumination - Wide Distribution Spreads Light for Maximum Coverage**
- **LED is Available – Contact Factory with Requirements**
- **Heavy Duty Die Cast Aluminum Housing**
- **Easy Ballast Access through Mounting Plate Provides Quick Maintenance**
- **High Impact Tempered Glass Lens**
- **Photocell Sensor Option**
- **Finish: Post Powdercoated Bronze**
- **Short Lead Times**