

**E-HBA SERIES
T5 HIGH BAY LUMINAIRE - 26" WIDE**






<p>Housing: 22GA steel. Finish: Baked white enamel, galvanized or post powdercoat steel. Construction: CNC formed and mechanically joined. Options: 11GA wireguard, prismatic or clear lens.</p>			<p>Mounting: Suspended. Distribution: Narrow to medium. Replacement for HID high bay. Electrical: Electronic Standard or High output options; Program Start Ballast is factory standard; <10% THD; Inherent thermal protection; Dimming & Emergency available. Labels: UL/CUL listed. Damp Location.</p>		
SPEC.	NOM.	DESCRIPTION	SPEC.	NOM.	DESCRIPTION
Finish	P	Powdercoat gloss white	Lens	---	Open - no designation needed
	G	Galvanized		WG	11 Gauge galvanized wireguard
W	Baked white enamel	AC		Clear acrylic lens .090" thick	
				PR	A12 prismatic acrylic .110" thick
Dimension	34	Nominal 26" wide x 48" long	Voltage	U	Universal volt 120-277 (factory standard)
				H	347-480 volt
1	120 volt (specify with LED or dimming)				
2	277 volt (specify with LED or dimming)				
3	347 volt (specify with LED or dimming)				
4	480 volt (specify with LED or dimming)				
1B	Emergency Battery Back-up 120v				
2B	Emergency Battery Back-up 277v (T5 std = 500 lumens or T5HO = 825 lumens)				
Lamping	8 10 L	<p>T5 = 54W or 28W per lamp Lamps are not included unless otherwise noted (8) lamps in cross section (10) lamps in cross section LED – contact factory & specify voltage</p>	Reflector	E	Enhanced Aluminum 95% reflective
				W	White Aluminum 90%+ reflective
			Ballast	S5 H5 DS DH	<p>T5 Standard Electronic T5 28W High Output Electronic T5 54W Dimming Standard Electronic T5 28W - specify type & voltage Dimming High Output Electronic T5 54W - specify type & voltage</p>
SP	2.5" Single Point Box (stem mount)				
			C	8ft Powercord, black 18/3 wire	
			Y	Y-fit Gripple® Toggle 12" Y x 11' long Shows as separate line item on order: part# H-Y12-132"HNGR	
Ballast	LED LDD	<p>LED LED Transformer – contact factory LED Dimming Transformer – contact factory</p>	Options	O	360° degree occupancy sensor
				A	Aisle occupancy sensor
			R	Relay	
			M	Multi-circuit wiring	

ORDERING NOMENCLATURE GUIDE

Standard Fixture: E-HBAW348H5UE										
Catalog # for a HBA Type Fixture – Baked White Enamel - Nominal 3 ft x 4 ft Long - 8 Lamps in cross section - High Output T5 Electronic Ballast - Open/No Lens - Universal Voltage - Enhanced Reflector - Standard Surface Mount - No Options.										
8E Product	Series	Finish	Dimension	Lamping	Ballast	Lens	Voltage	Reflector	Mounting	Options
E -	HBA									

**E-HBA SERIES
T5 HIGH BAY LUMINAIRE - 26" WIDE**

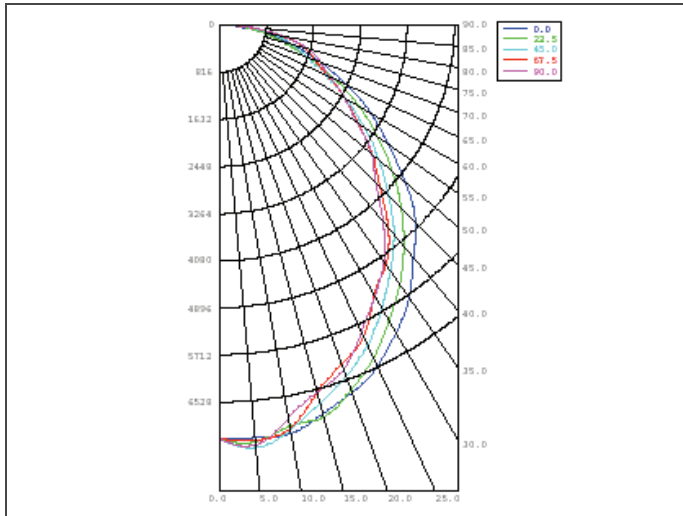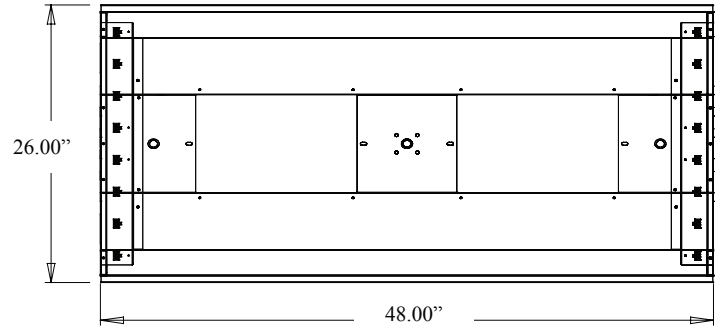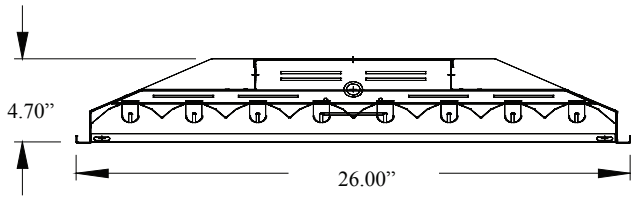

PRODUCT NUMBER = E-HBAW348H5UE

FIXTURE EFFICIENCY = 94.6%

S.M.H. = 1.08

WATTAGE = 468W (BASED ON 277V)

RCR TABLE AVAILABLE

IES PHOTOMETRIC FILE AVAILABLE

SPECIFICATION CHARACTERISTICS

- **Narrow to Medium Distribution Utilizing Energy Efficient Components Throughout**
- **Highly Efficient Luminaire – Over 94%**
- **Replaces 750 - 1000 Watt HID High Bay**
- **Instant On, Long Life, Lower Energy Consumption, No Color Shift**
- **Uniform Illumination**
- **LED is Available – Contact Factory with Requirements**
- **Vented for Optimum Lamp Performance**
- **Dimming, Emergency, Occupancy Sensor or Light Level Sensor Options**
- **Multiple Mounting Options: Chain or Gripple Ready, Single Point Mounting Box or Cord**
- **Multiple Lens Options: Wire Guard, Prismatic, Clear Acrylic, or Clear Polycarbonate Lens**
- **Multiple Finish Options: Gloss White Post Powdercoated, Galvanized or Baked White Enamel Steel**
- **Short Lead Times**