

E-CB SERIES
T8 or T5 CHALK BOARD WALL WASH RECESSED LUMINAIRE






<p>Housing: 24GA steel. New York City code 20GA available. Finish: Baked white enamel or post powdercoat steel. Construction: CNC formed and mechanically joined. Lens: A19 or A12 acrylic prismatic.</p>			<p>Mounting: Recessed. Distribution: Asymmetric wall wash. Electrical: Electronic Low, Standard or High output options; Instant Start is factory standard for T8, Program Start for T5; <10% THD; Inherent thermal protection; Dimming & Emergency available. Labels: UL/CUL listed. Damp Location.</p>		
SPEC.	NOM.	DESCRIPTION	SPEC.	NOM.	DESCRIPTION
Finish	---	Baked white enamel – no designation needed Powdercoat gloss white	Lens	A9 PR	Prismatic Lens A19 .110" thick Prismatic Lens A12 .110" thick
Dimension	12 14	Nominal 12" wide x 24" long Nominal 12" wide x 48" long	Voltage	U H 1 2 3 4 1B 2B	Universal volt 120-277 (factory standard) 347-480 volt 120 volt (specify with LED or dimming) 277 volt (specify with LED or dimming) 347 volt (specify with LED or dimming) 480 volt (specify with LED or dimming) Emergency Battery Back-up 120v Emergency Battery Back-up 277v (T8 = 500 lumens factory standard) (T5 std = 500 lumens or T5HO = 825 lumens)
Lamping	1 2 L	T8 = 32W or 17W per lamp T5 = 54W, 21W or 28W, 14W per lamp Lamps are not included unless otherwise noted (1) lamp in cross section (2) lamps in cross section LED – contact factory & specify voltage	Reflector	E W	Enhanced Aluminum 95% reflective White Aluminum 90%+ reflective
Ballast	S L H D P SP HP N S5 H5 DS DH LED LDD	T8 Standard Electronic T8 Low Output Electronic T8 High Output Electronic T8 Electronic Dimming T8 – specify type & voltage Program Start Electronic T8 Standard Output/Program Start Combination T8 High Output/Program Start Combination T8 No Ballast - Slave T5 Standard Electronic T5 28W High Output Electronic T5 54W Dimming Standard Electronic T5 28W – specify type & voltage Dimming High Output Electronic T5 54W – specify type & voltage LED LED Transformer – contact factory LED Dimming Transformer – contact factory	Mounting	---	Recessed Mounted (standard) - no designation needed Surface Mounted available – see CBS Series
			Options	S M2 M3 M4 N	Slave Master 2 Lamp Master 3 Lamp Master 4 Lamp New York City code - 20GA housing

ORDERING NOMENCLATURE GUIDE

Standard Fixture: E-CBP141SA9UE
 Catalog # for a CB Type Fixture – Powdercoated Gloss White - Nominal 1 ft x 4 ft Long - 1 Lamp in cross section - Standard T8 Electronic Ballast - A19 Acrylic Lens - Universal Voltage - Enhanced Reflector - Recessed - No Options.

8E Product	Series	Finish	Dimension	Lamping	Ballast	Lens	Voltage	Reflector	Mounting	Options
E -	CB									

E-CB SERIES
T8 or T5 CHALK BOARD WALL WASH RECESSED LUMINAIRE

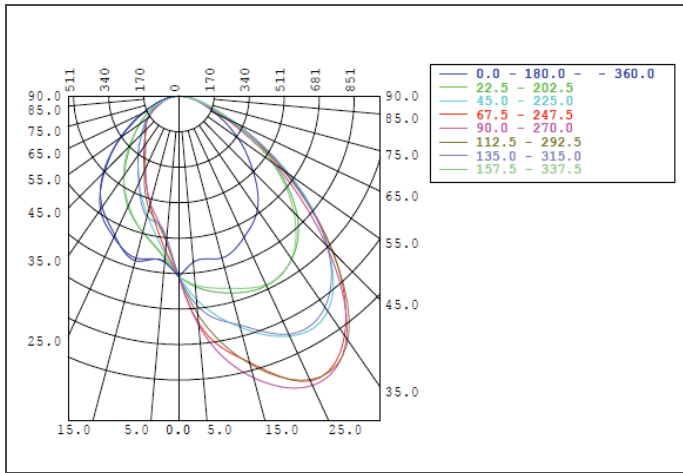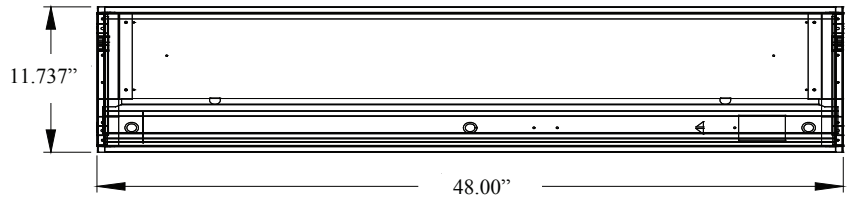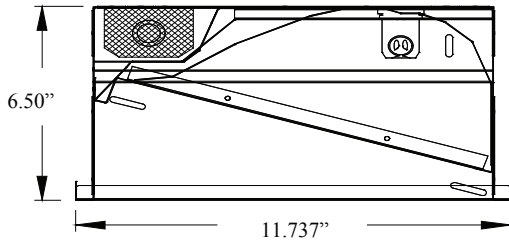

PRODUCT NUMBER = E-CBP141SA9UE

FIXTURE EFFICIENCY = 79%

S.M.H. = 1.22

WATTAGE = 28W (BASED ON 277V)

RCR TABLE AVAILABLE

IES PHOTOMETRIC FILE AVAILABLE

SPECIFICATION CHARACTERISTICS

- **Asymmetric Wall Wash Distribution Utilizing Energy Efficient Components Throughout**
- **Highly Efficient Luminaire – 79%**
- **Instant On, Long Life, Lower Energy Consumption, No Color Shift**
- **LED is Available – Contact Factory with Requirements**
- **Dimming, Emergency Options**
- **Spring-loaded Bullet Latches allow Opening from Any Side**
- **Gasketed to Eliminate Light Leaks**
- **Integrated Earthquake Wire Attachment Points**
- **Quick-Wire Access Plate**
- **Multiple Lens Options: Prismatic Acrylic A12 or A19 Pattern**
- **Multiple Finish Options: Gloss White Post Powdercoated or Baked White Enamel Steel**
- **20GA Housing Available for New York City Code Requirements for Recessed Fixtures**
- **Short Lead Times**