



Project:
Type:
Quantity:

E-BA142S425RU or E-BA184S425RUE
FULLY ASSEMBLED BALLAST COVER ACCESS PLATE RETROFIT SYSTEM

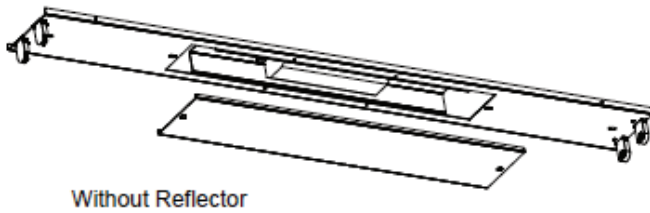

Without Reflector

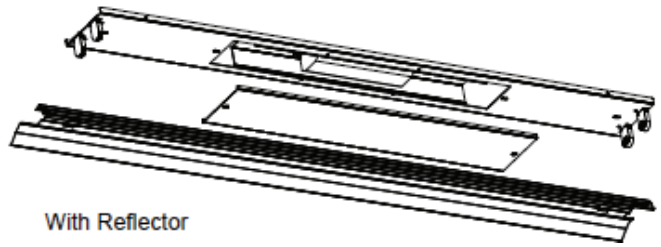

With Reflector

Dimension: .020 nominal thickness, multi-faceted reflector surface. 24GA steel ballast cover and access plate.

Finish: Enhanced aluminum (Miro4), Painted white aluminum, or Premium aluminum available. Baked white enamel kit parts.

Construction: CNC formed and mechanically joined.

Mounting: Ballast cover systems are mounted using #8 Tek screw hardware. Access plate provided for easy ballast access.

Fixture Includes: Ballast cover, access plate, ballast saddle, ballast, lamp holders and quarter-turns. Fully assembled. Ready for installation.

Electrical: Electronic Low, Standard or High output options; Instant Start is factory standard; <10% THD; Inherent thermal protection; Dimming and Emergency available.

Labels: UL/CUL listed.

SPEC.	NOM.	DESCRIPTION
Ballast Cover Kit Type	BA	Fully Assembled Ballast Cover Access Plate Kit
Dimension	14 16 18	Nominal 48" long Nominal 72" long (custom – consult factory) Nominal 96" long
Lamping	1 2 3 4 6	T8 = 32W, 25W or 17W per lamp Lamps are not included unless otherwise noted (1) lamp in cross section (2,3,4ft) (2) lamps in cross section (2,3,4ft); 1 in cross (6,8ft) (3) lamps in cross section (2,3,4ft) (4) lamps - 2 in cross section (6,8ft only) (6) lamps - 3 in cross section (6,8ft only)

SPEC.	NOM.	DESCRIPTION
Channel Width	4 425 45 475 5	<u>Standard Channel Widths</u> 4.00" channel width 4.25" channel width 4.50" channel width 4.75" channel width 5.00" channel width
	Custom Fill in: ----	<u>Custom Channel Widths</u> Consult Factory for any channel widths not shown. See Survey Sheet for instructions on how to measure channel sizes. We can design specific channel sizes from 2.75" – 10", up to 3 lamps in cross section.
Lamp holders	R	Ratchet/rotary, positive-locking, long lampholders included.
Voltage	U H 1B 2B	Universal volt 120-277 (factory standard) 347-480 volt Emergency Battery Back-up 120v Emergency Battery Back-up 277v (T8 = 500 lumens factory standard)
Reflector	--- E W P	No Reflector Enhanced Aluminum 95% reflective White Aluminum 90%+ reflective Premium Aluminum 86% reflective
Options	F M2 M3 M4	GL Fuse Master 2 Lamp order slave separate under K-BC Master 3 Lamp Master 4 Lamp (Slave ordered separately – see K-BC cut sheet or contact factory for assistance)

ORDERING NOMENCLATURE GUIDE

Standard Fixture: E-BA142S425RU
Catalog # for a Fully Assembled Ballast Cover Access Plate Kit - Nominal 1 ft x 4 ft Long - 2 Lamps in cross section - 4.25" channel width - Standard T8 Electronic Ballast - Includes lampholders - Universal Voltage - No reflector - No options.
Above kit includes 1, 4ft ballast cover, 1 ballast access plate, 1 ballast saddle, 1 ballast and 4 lampholders, all fully assembled.

8E Kit	Kit Type	Dimension	Lamping	Channel Width	Lampholders	Voltage	Reflector	Options
E -	BA							

