

E-CS SERIES
T8 CORRECTIONAL FACILITIES SURFACE MOUNT LUMINAIRE






| <p>Housing: 16GA cold rolled steel or stainless steel. Finish: Post powdercoat steel or satin stainless steel surface. Construction: CNC formed and mechanically joined. Lens: ¼" polycarbonate or tempered glass clear lens.</p> | | | <p>Mounting: Surface mounted. Distribution: Medium to wide. Electrical: Electronic Low, Standard or High output options; Instant Start is factory standard; <10% THD; Inherent thermal protection; Dimming & Emergency available. Labels: UL/CUL listed. Damp Location.</p> | | | | |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|
| SPEC. | NOM. | DESCRIPTION | SPEC. | NOM. | DESCRIPTION | | |
| Finish | P | Powdercoat gloss white | Lens | PC | Clear Polycarbonate Lens ¼" thick Tempered Glass Lens ¼" thick | | |
| | Z | Please specify other color on PO if required. Satin Stainless Steel 300 series | | G | | | |
| Dimension | 12 | Nominal 9" wide x 24" long | Voltage | U | Universal volt 120-277 (factory standard) 347-480 volt 1 120 volt (specify with LED or dimming) 2 277 volt (specify with LED or dimming) 3 347 volt (specify with LED or dimming) 4 480 volt (specify with LED or dimming) 1B Emergency Battery Back-up 120v 2B Emergency Battery Back-up 277v (T8 = 500 lumens factory standard) | | |
| | | | | L | | T8 = 17W per lamp Lamps are not included unless otherwise noted (2) lamps in cross section LED – contact factory & specify voltage | |
| Ballast | S | Standard Electronic T8 Low Output Electronic T8 High Output Electronic T8 Electronic Dimming T8 - specify type & voltage Program Start Electronic T8 Standard Output/Program Start Combination T8 High Output/Program Start Combination T8 | | Reflector | | --- | No Reflector (standard) - no designation needed |
| | L | | | | | | |
| | H | | | | | | |
| | D | | | | | | |
| Mounting | P | Standard Output/Program Start Combination T8 High Output/Program Start Combination T8 | | Mounting | | --- | Surface Mounted (standard) - no designation needed |
| | SP | | | | | | |
| | HP | | | | | | |
| Options | LED | LED Transformer – contact factory LED Dimming Transformer – contact factory | Options | O | 360° degree occupancy sensor Aisle occupancy sensor Relay Multi-circuit wiring | | |
| | LDD | | | | | | |

ORDERING NOMENCLATURE GUIDE

| Standard Fixture: E-CSP122SGU | | | | | | | | | | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|--------|-----------|---------|---------|------|---------|-----------|----------|---------|
| Catalog # for a CS Type Fixture – Powdercoated Gloss White - Nominal 1 ft x 2 ft Long - 2 Lamps in cross section - Standard T8 Electronic Ballast - Clear Tempered Glass Lens - Universal Voltage - No Reflector - Standard Surface Mount - No Options. | | | | | | | | | | |
| 8E Product | Series | Finish | Dimension | Lamping | Ballast | Lens | Voltage | Reflector | Mounting | Options |
| E - | CS | | | | | | | | | |

E-CS SERIES
T8 CORRECTIONAL FACILITIES SURFACE MOUNT LUMINAIRE

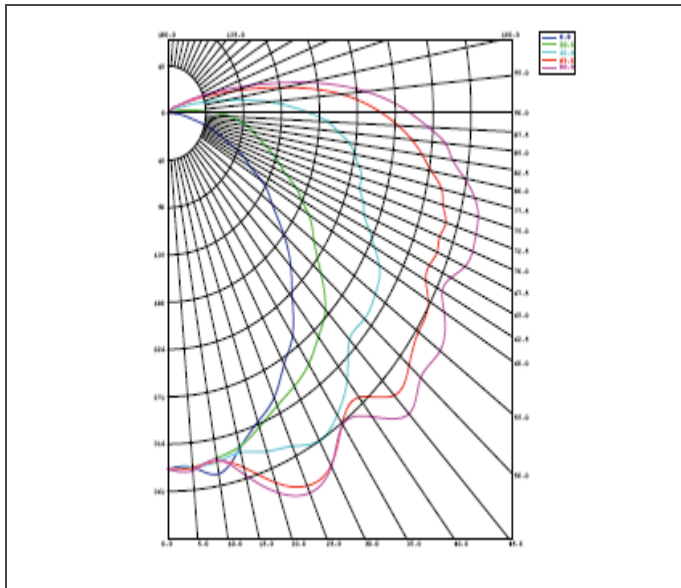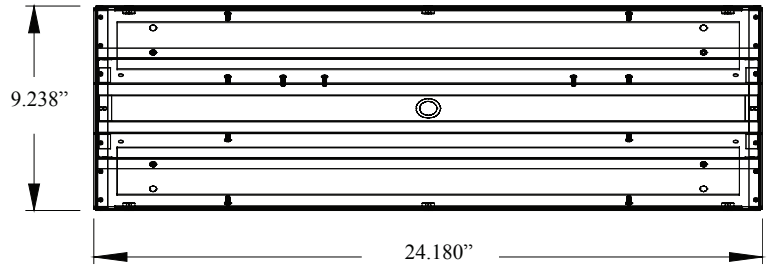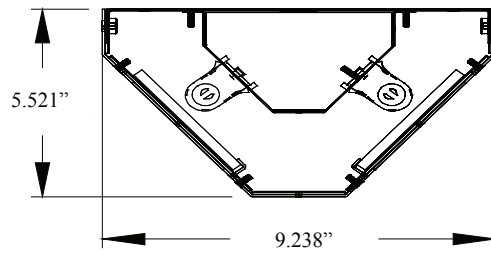

PRODUCT NUMBER = E-CSP122SGU
FIXTURE EFFICIENCY = 70%
S.M.H. = 1.2
WATTAGE = 32W (BASED ON 277V)
RCR TABLE AVAILABLE
IES PHOTOMETRIC FILE AVAILABLE

SPECIFICATION CHARACTERISTICS

- **Medium to Wide Distribution Utilizing Energy Efficient Components Throughout**
- **Highly Efficient Luminaire – Over 70%**
- **Instant On, Long Life, Lower Energy Consumption, No Color Shift**
- **Uniform Illumination**
- **LED is Available – Contact Factory with Requirements**
- **Dimming, Emergency, Occupancy Sensor or Light Level Sensor Options**
- **Torx Tamperproof Hardware for Vandal Resistance - Penitentiaries, Institutions, Schools, etc.**
- **Surface Mount**
- **Multiple Lens Options: 1/4" Tempered Glass or 1/4" Clear Polycarbonate Lens**
- **Finish: Gloss White Post Powdercoated or Stainless Steel**
- **Short Lead Times**