

**E-WF SERIES
T8 WRAP FLANGE**






<p>Housing: 22GA steel. Finish: Baked white enamel or post powdercoat steel. Construction: CNC formed and mechanically joined. Lens: Prismatic, acrylic wrap with optional wireguard.</p>			<p>Mounting: Surface mounted. Distribution: Wide. Electrical: Electronic Low, Standard or High output options; Instant Start is factory standard; <10% THD; Inherent thermal protection; Dimming & Emergency available. Labels: UL/CUL listed. Damp Location.</p>		
SPEC.	NOM.	DESCRIPTION	SPEC.	NOM.	DESCRIPTION
Finish	---	Baked white enamel – no designation needed Powdercoat gloss white	Lens	PW PG	Prismatic acrylic wrap Prismatic acrylic wrap + 11 GA galvanized wireguard
Dimension	12 13 14 18	Nominal 13" wide x 24" long Nominal 13" wide x 36" long Nominal 13" wide x 48" long Nominal 13" wide x 96" long	Voltage	U H 1B 2B	Universal volt 120-277 (factory standard) 347-480 volt Emergency Battery Back-up 120v Emergency Battery Back-up 277v (T8 = 500 lumens factory standard)
Lamping	1 2 3 4 6	T8 = 32W, 17W per lamp Lamps are not included unless otherwise noted (1) lamp in cross section (2,4ft) (2) lamps in cross section (2,4ft); 1 in cross (8ft) (3) lamps in cross section (2,4ft); 1&2 in cross (8ft) (4) lamps - 2 in cross section (8ft only) (6) lamps - 3 in cross section (8ft only)	Reflector	E W	Enhanced Aluminum 95% reflective White Aluminum 90%+ reflective
Ballast	S L H D P SP HP	Standard Electronic T8 Low Output Electronic T8 High Output Electronic T8 Electronic Dimming T8 – specify type & voltage Program Start Electronic T8 Standard Output/Program Start Combination T8 High Output/Program Start Combination T8	Mounting	---	Surface Mounted (standard) - no designation needed
			Options	M O A R	Multi-circuit wiring 360° degree occupancy sensor Aisle occupancy sensor Relay

ORDERING NOMENCLATURE GUIDE

Standard Fixture: E-WF142SPWUE										
Catalog # for a WF Type Fixture – Baked White Enamel - Nominal 1 ft x 4 ft Long - 2 Lamps in cross section - Standard T8 Electronic Ballast - Prismatic Wrap Lens - Universal Voltage - Enhanced Reflector - Standard Surface Mount - No Options.										
8E Product	Series	Finish	Dimension	Lamping	Ballast	Lens	Voltage	Reflector	Mounting	Options
E -	WF									

E-WF SERIES
T8 WRAP FLANGE

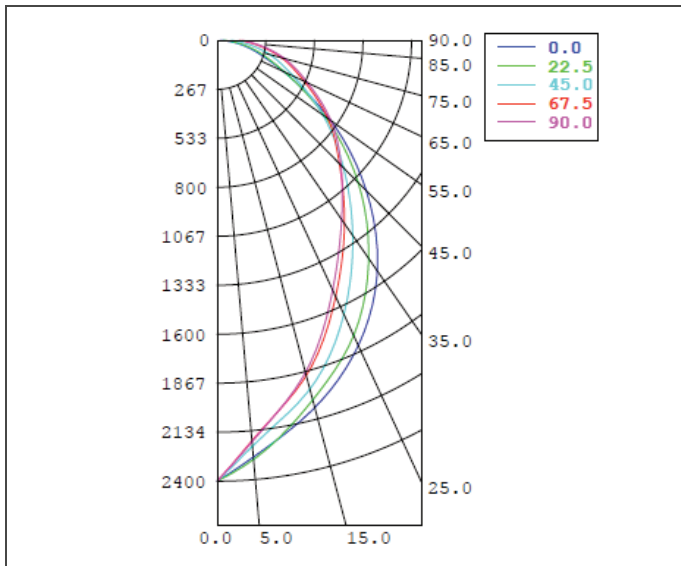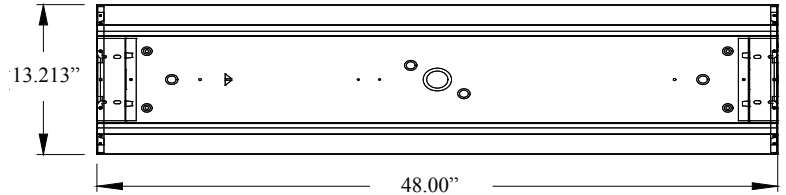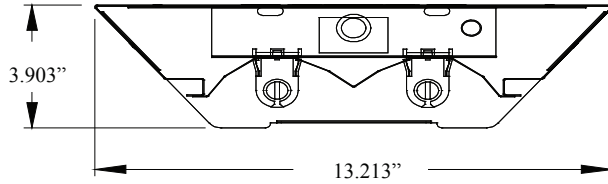

PRODUCT NUMBER = E-WF142SPWUE
FIXTURE EFFICIENCY = 81.1%
S.M.H. = 0.88
WATTAGE = 52W (BASED ON 277V)
RCR TABLE AVAILABLE
IES PHOTOMETRIC FILE AVAILABLE

SPECIFICATION CHARACTERISTICS

- **Wide Distribution Utilizing Energy Efficient Components Throughout**
- **Highly Efficient Luminaire – Over 81%**
- **Instant On, Long Life, Lower Energy Consumption, No Color Shift**
- **Uniform Illumination**
- **Low Profile, Space-Saving Design**
- **Wide, 13" Mounting Base Assures Clean Cover-Up of Previous Fixture**
- **Ballast Access Gained Without Tools**
- **Dimming, Emergency Options**
- **Prismatic Wrap Acrylic Lens for Wide, Even Distribution**
- **Multiple Finish Options: Gloss White Post Powdercoated or Baked White Enamel Steel**
- **Short Lead Times**